LINDY PRODUCT SPECIFICATION (1 OF 1)

Weight with	Weight without	Polybag Size	Overall Length	Product Number
0.025kg	0.02kg	P01	0.2m	**31703**
0.04kg	0.03kg	P01	0.5m	**31693**
0.06kg	0.05kg	P02	1m	**31694**
0.09kg	0.08kg	P02	2m	**31695**
0.13kg	0.12kg	P02	3m	**31696**
0.22kg	0.20kg	P02	5m	**31697**

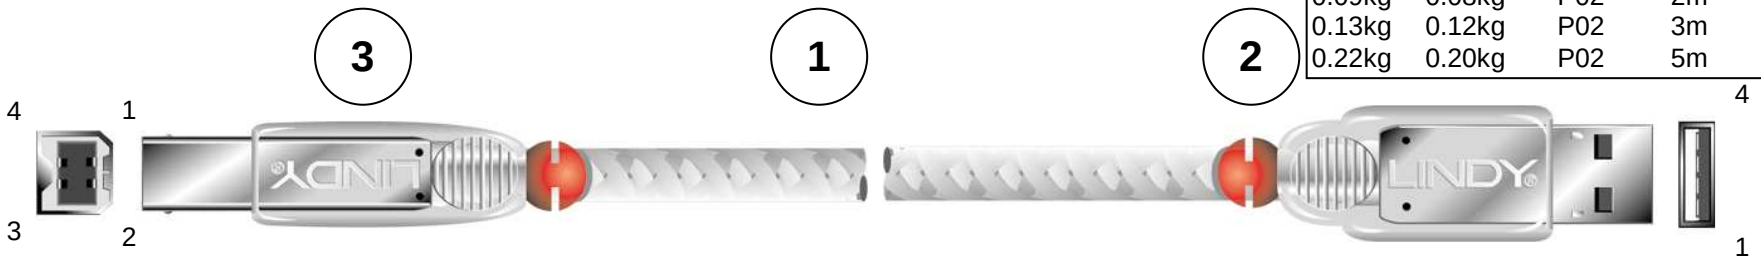

CONNECTOR A
USB 2.0 Type B MALE

Cable printing:
Exxxxxx AWM STYLE 2725 80℃ 30V LINDY USB 2.0 High Speed Cable – RoHS - www.LINDY.com

CONNECTOR B
USB 2.0 Type A MALE

NO	DESCRIPTION	QTY
1	CABLE USB 2.0 compliant 28AWG (7/0.127TC) x1T/p + 26AWG(7/0.16TC)x2C Double Shield (Foil + Braid 45%) (16*3/0.10TC Braid), Jacket colour LINDY transparent clear OD:4.4+/- 0.15mm, Jacket material: 70P PVC, USB certificated (No.7923) for E324703	1
2	USB A MALE Solder type USB2.0 compliant / LINDY Design transparent	1
3	USB B MALE Solder type USB2.0 compliant / LINDY Design transparent	1

A	B	COLOUR	AWG
1	1	RED	26AWG
2	2	WHITE	28AWG
3	3	GREEN	28AWG
4	4	BLACK	26AWG
Can	Can		

PIN OUT

Description: **USB 2.0 Type A / B**
Connector A: LINDY Design transparent USB Type B Plug
Connector B: LINDY Design transparent USB Type A Plug
Colour: LINDY transparent with red S/R

Packaging: LINDY Polybag with barcode label and minifolder

Alterations	Issue	Date	BY	GB	DE
Blank UL No.	15	05.05.10	TL		ML
Weight Amended	16	09.11.10	CN	oH	
Spec sheet updated	17	07.02.11	ML		ML

Drawn By: RB 03072001

All connectors viewed from front

The following tolerances apply to overall dimensions -0% +10%

© LINDY Electronics Ltd.,